



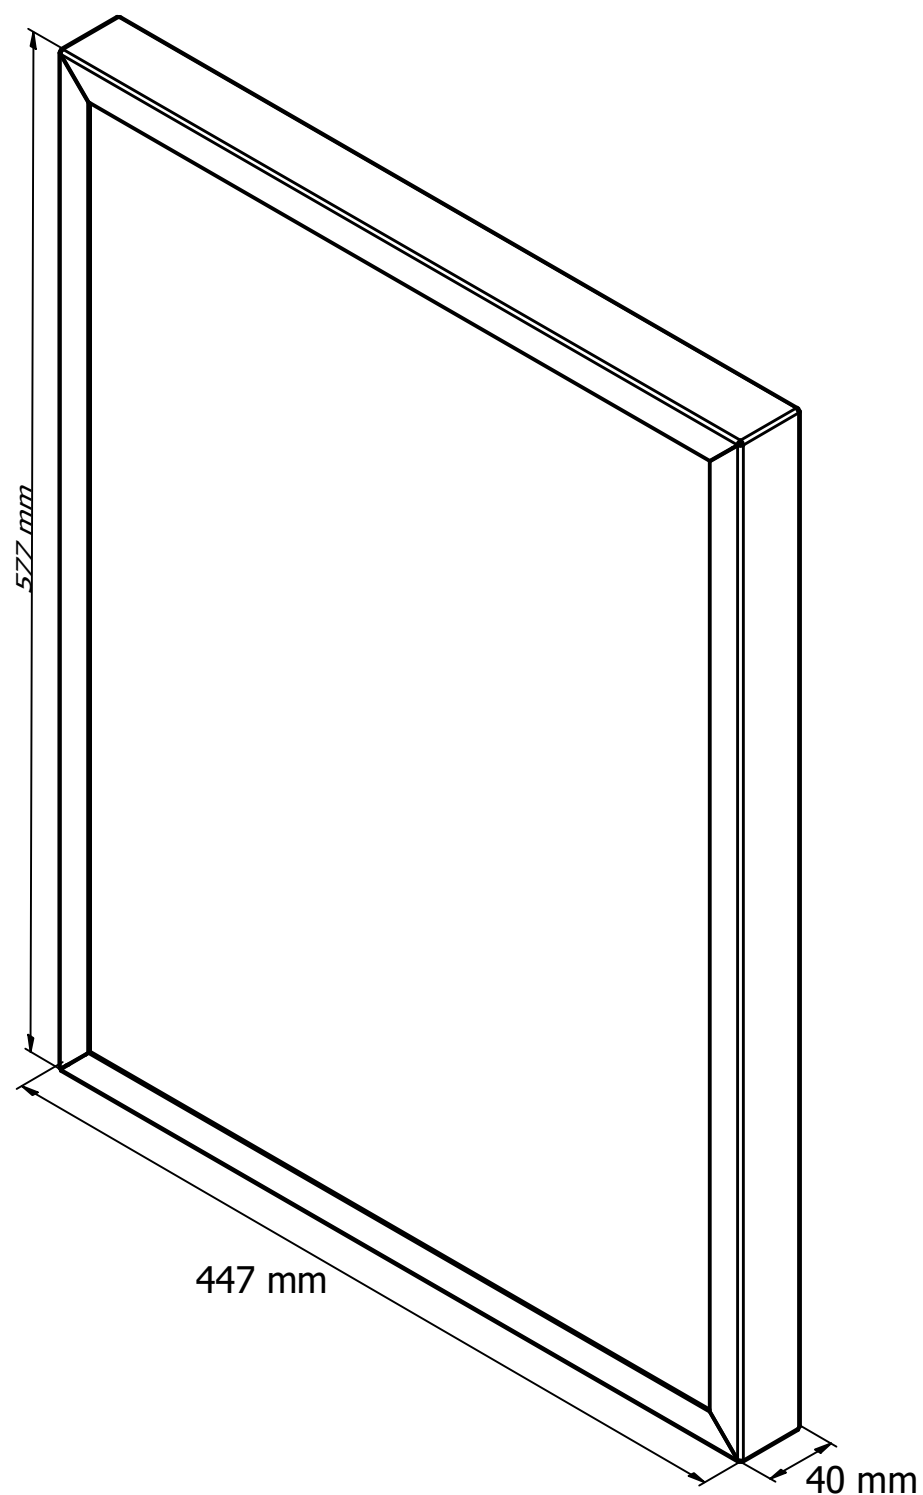

A brand of RO & CO S.p.A
via Masaccio, 15
42124 Reggio Emilia (RE) ITALY
Tel. +39 0522 1545193
Fax +39 0522 1546451
vendite@worky-italy.com
sales@worky-italy.com
www.worky-italy.com

SMOBIP-FILCFM-technical datasheet

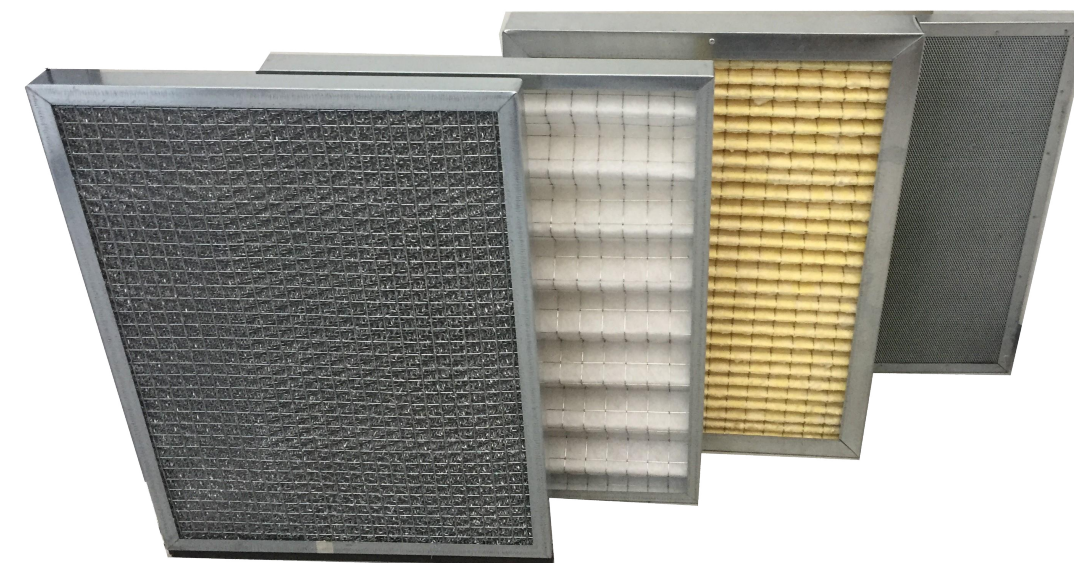

IT

IMPIEGO SPECIFICO

Antiscintilla

APPLICAZIONI

Arresto del materiale più grossolano unitamente alle scintille prodotte dalle lavorazioni meccaniche.

DIMENSIONI

577 x 447 x H 40 mm

2 Kg NET

DATI TECNICI

Composizione media filtrante	calza in alluminio
Materiale telatio	lamiera zincata
Rigenerabilità	sì

Temperatura max di esercizio	200°C - 392°F
U.R. max di esercizio	100%

DATI FUNZIONALI

Portata aria nominale	1870 m ³ /h
Perdita di carico iniziale	32 Pa
Perdita di carico finale	250 Pa
Arrestanza gravimetrica media	75%
Classificazione (EN 779:2002)	G2
Classificazione (ISO 16890)	coarse 30%
Comportamento alla fiamma	ininfiammabile

EN

SPECIFIC USE

Spark arrestor

APPLICATION

Blocking the biggest particles together with the sparks produced by the metalworking.

DIMENSIONS

577 x 447 x H 40 mm

2 Kg NET

TECHNICAL DATA

Average filtering composition	aluminium mesh
Frame material	galvanized sheet steel
Regeneability	yes

Maximum exercise temperature	200°C - 392°F
Maximum exercise humidity	100%

FUNCTIONAL DATA

Nominal air-flow rate	1870 m ³ /h
Initial pressure drop	32 Pa
Final pressure drop	250 Pa
Average gravimetric arrest	75%
Classification (EN 779:2002)	G2
Classification (ISO 16890)	coarse 30%
Flame reaction	flame resistant